




OUTDOOR LightPanel SYSTEM

The **OUTDOOR** LightPanel design was developed for exterior applications and is uniquely designed to resist rough weather conditions such as rain or snow with an IP65 rating.

The **OUTDOOR** LightPanel can be used in a variety of environments (outdoors and indoors) with varied conditions that include dry and damp locations. (Cannot sit in standing water or be submerged.)

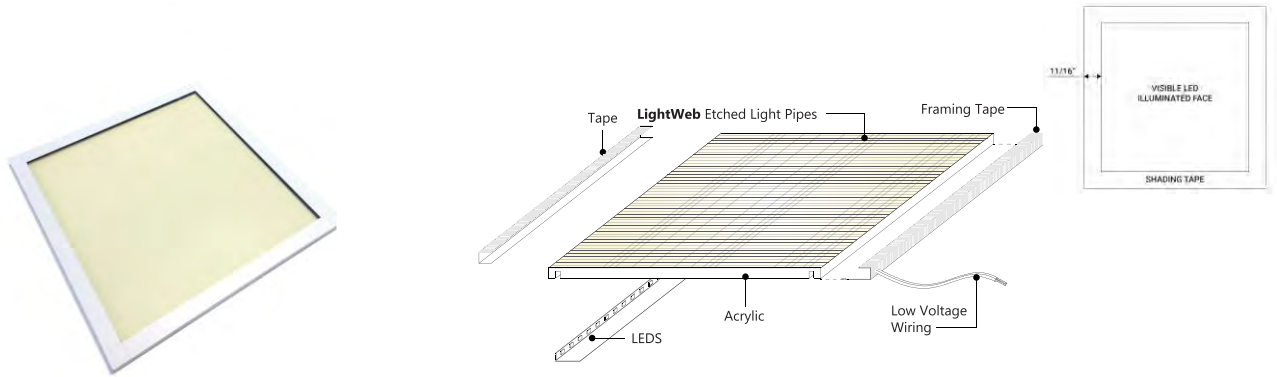

The **OUTDOOR** LightPanel allows designers to back light custom shapes in a number of applications:

 Hospitality	 Retail	 Healthcare	 Residential	 Accent Lighting
 Branding	 Commercial Interior	 Millwork	 Cove Lighting	 Task Lighting
 Custom Fixtures	 Logos and Signage	 Commercial Exterior		

General Specifications

LIGHT WEB TECHNOLOGY™ :

3D etched patterns to evenly distribute light throughout the panel. Patterns available are GRID, DOT and MICRODOT™

MAXIMUM SIZE :

120" x 60" (consult with eos specialist for recommendations with oversize panels)

MINIMUM SIZE :

4" X 4"

THICKNESS:

1/4"-1/2"

*Thickness is determined by panel shape, size and color temperature.

LONG LIFE :

Over 50,000 hours = Nearly 12 years based on 12 hours a day. Once installed, the LightPanel System is virtually maintenance free.

POWER OPTIONS:

24VDC Standard and 24VDC High Power, 12VDC Available upon request

DRIVER INPUT VOLTAGE :

100V TO 480V

WATTAGE :

4.3 W/Ft. - 24V Standard Power (Optional: 12V)

5 W/ Ft. - 24V - High Power

*ask eos specialist for information on RGB, RGBW and Color Tuning options.

DIMMABLE :

The system is dimmable to <10% when matched with Dimmable Power Supplies

LEDs :

ANSI Binned LEDs from Tier 1 Suppliers

LED CRI > 80, 95+ Premium option

LED CRT - 1800K - 7500K

WIRE GAUGE:

20GA Wiring for White and Color Tuning Panels, 24GA for Color

IP RATING:

All Outdoor LightPanels are IP65 Rated when driven with a Class 2 Power Supply. Pre-drilled holes on outdoor LightPanels will reduce IP rating.


HOSPITAL AND MRI SAFE :

The system contains non-ferrous materials, making the LightPanel safe for MRI suites. The LightPanel Power supply must be installed remotely, up to 30 feet from the application.

SERVICE AND INSTALLATION :

The LightPanel System can be predrilled by our production team with customer's specifications.

Optional Specifications




USB COMPATIBLE :

* Max. Size 40" X 40" (wattage permitting)



COMPATIBLE POWER SUPPLIES :

- 0-10V dimming • DMX/DALI
- Electronic low voltage (ELV)
- Remote control plug-in
- Inline plug-in



COLOR TEMPERATURES :

- 1800K • **2400K** • **2700K** • **3000K**
- 3500K • **4000K** • 5000K • **6000K***
- **6500K** • 7500K • UV (Ultraviolet)

*formerly 5300K

Bolded colors are commonly available in stock.



MULTIPLE PANEL MOUNTING OPTIONS:

- Z-Profiles • Stand Offs
- Aircraft Cable Mounts • Pre-Drilled holes by factory
- Panels are drillable on site* (use only eos suggested method in brochure)



APPROVALS AND CERTIFICATIONS:

The LightPanel System is UL listed for Architectural applications and UL recognized for signage. All power supplies are UL / ETL listed.

<https://eoslight.com/user-guide/>



DOWNLOAD OUR
USER GUIDE FOR WIRING &
INSTALLATION INSTRUCTIONS





Product Specification Ordering Form

NAME:	PROJECT NAME:	ADDRESS:
PHONE:	PROJECT LOCATION:	CITY:
EMAIL:	ANTICIPATED DELIVERY DATE:	ZIP CODE:
COMPANY NAME:	PROJECT SPECIFIER:	RUSH PROJECT: <input type="checkbox"/> Yes <input type="checkbox"/> No

QTY	PANEL TYPE	VOLTAGE	DIMENSIONS (INCHES) TOP SIDE		LED SIDES	COLOR TEMP	LED POWER	DIFFUSER	CORD LENGTH	CORD LOCATION	CORD COLOR	POWER SUPPLY	IF CURVED PANEL SPECIFY RADIUS (INCHES)
5	LP	24V	48	50	4SL	2700	SP	DIF	CC6	TL	BC	010V	20

A PANEL TYPE

LP - BASIC

LightPanel (use For Curved Panel As Well)

LF - FRAMED

LightPanel With C Channel 7/16"
LightPanel With J1 Channel 1/4"
LightPanel With J2 Channel 5/16"

CP - CRYSTAL

LightPanel

CF - CRYSTAL FRAMED

LightPanel With C Channel 7/16"

WP - OUTDOOR

LightPanel - Outdoor (Cannot sit in standing water or be submerged)

AM - ARCHITECTURAL MILLWORK

LightPanel

B VOLTAGE

24V - 24V (Standard)
12V - 12V (Optional)


C DIMENSIONS

(Generated by Client)

C1- Top Dimension
C2- Side Dimension

*For custom shapes, please provide:


- Longest Outside Dimensions
- Drawing

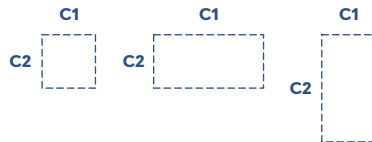

D LED SIDES

- 1SL - One Side
- 2SL - Two Sides
- 3SL - Three Sides
- 4SL - Four Sides

Top Dimension

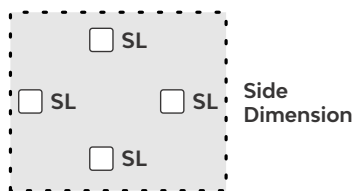

*Please note, the longest length is typically the LED side when selecting 1SL or 2SL

E COLOR TEMP

- | | |
|--------------|-------------------------------|
| 1800 - 1800K | 6500 - 6500K |
| 2400 - 2400K | 7500 - 7500K |
| 2700 - 2700K | UV - Ultraviolet |
| 3000 - 3000K | RGB - Color Changing |
| 3500 - 3500K | RGBW - Color Changing |
| 4000 - 4000K | + White (6000K, 4000K, 2700K) |
| 5000 - 5000K | CT- Color Tuning |
| 6000 - 6000K | (2400K to 6000K) |

F LED POWER


SP- Standard Power PSP- Premium Standard Power (95+ CRI)
HP- High Power PHP- Premium High Power (95+ CRI)

G OPTIONAL 2MM DIFFUSION OPAL

YES - DIF NO - ND

H POWER CORD LENGTH

SC - Standard - 9.8 ft.
CC_ - Custom Length ____ ft



I POWER CORD EXIT

TL - Top Left Corner BL - Bottom Left Corner
TR - Top Right Corner BR - Bottom Right Corner
STL - Side Top Left Corner SBL - Side Bottom Left Corner
STR - Side Top Right Corner SBR - Side Bottom Right Corner

J POWER CORD COLOR

BC - Black WC - White

K POWER SUPPLY INFO

- 010V - 010V Dimmable Hardwire
- ELV - Electronic Low Voltage Dimmable Hardwire
- DMX - DMX /DALI
- PI - Plug In, DC Jack
- DPI - Dimmable Plug in w/ remote



PROJECT NAME:

PROJECT LOCATION:

Please fill out the form

ITEM	QTY	A	B	C1	C2	D	E	F	G	H	I	J	K	L
		PANEL TYPE	VOLTAGE	DIMENSIONS		LED SIDES	COLOR TEMP	LED POWER	DIFFUSER	CORD LENGTH	CORD LOCATION	CORD COLOR	POWER SUPPLY	IF CURVED PANEL SPECIFY RADIUS(INCHES)
				TOP	SIDE									
1	5	LP	24V	48	50	4SL	2700	SP	DIF	CC6	TL	BC	010V	20

1. What is the Application the panels will be used for?
 E.g.: Hospitality, Retail, Signage Etc.

2. What are the LightPanels backlighting?
 E.g.: Stone, Graphic, Glass, Acrylic Etc.

3. Will the LightPanels be installed adjacent to one another?
 Yes No
 If Yes, Please Provide Drawing of Panel Layout

4. Will the LightPanels be powered individually (1:1) or would you like to connect Multiple LightPanels to a single driver?

5. Are there any installation details to review?

5. Is there an existing Dimming or Lighting Control System?
 If so, please provide Representative with information of the Control system (specs, manufacturer, etc.)

Additional information: